


3200 SERIES



Specifications:

- Flat Belt End Drive, Cleated Belt End Drive, and Center Drive models
- Z-frame Flat Belt End Drive & Center Drive
- Z-frame Cleated and Sidewall Cleated Belt End Drive
- Loads up to 1,000 lbs (455 kg)
- Belt speeds up to 421 ft/min (128 m/min)
- Belt Widths: 3.75" (95 mm) to 48" (1,219 mm)
- Conveyor Lengths: 3' (914 mm) to 99' (30,175 mm)
- 3" (76 mm) diameter head and tail pulleys
-  models available

Features & Benefits:


- Quick five-minute belt change
- Rack and pinion belt tensioning for fast, accurate single point belt tensioning
- V-groove bed plate with guided belt provides positive belt tracking, even under demanding side load applications
- Belt take-up indicator allows for quick reading of remaining belt life
- Strong, box-like construction resists damaging frame twist
- Stand mounting brackets and return belt rollers are easily re-positioned along the frame
- Two T-Slots on each side for easy mounting of pre-engineered accessories




**V-Guided
Belt Tracking**



**Rack and Pinion
Belt Tensioning**

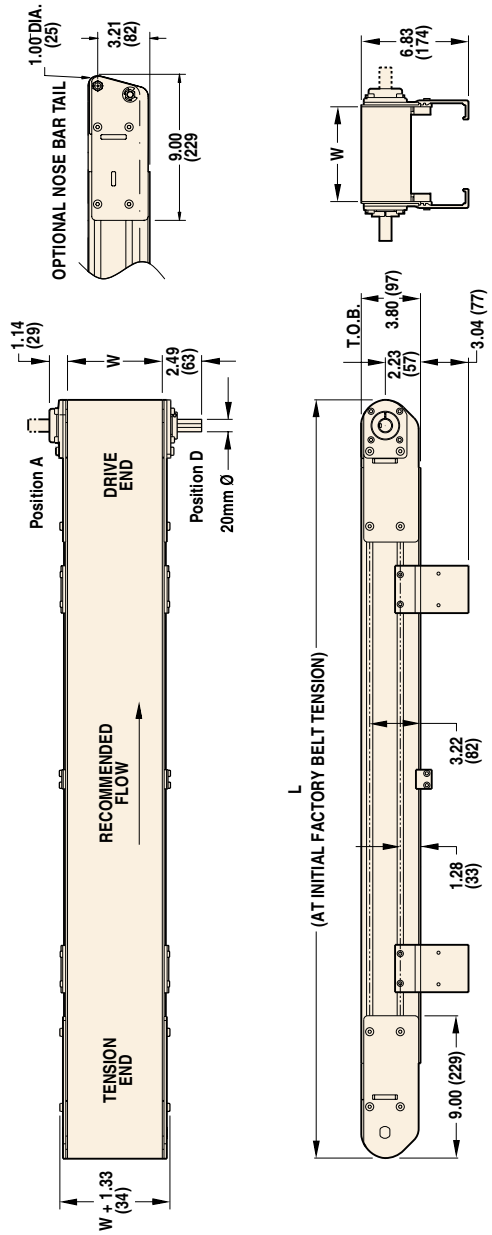

Configurations Available



Z-frame

Nose Over

Horizontal to Incline

Straight

STANDARD MODELS



Flat Belt End Drive



Cleated Belt End Drive



Flat Belt Center Drive

STANDARD OPTIONS

Nose Bar Tail Section

- Widths up to 48" (1,219 mm)
- Available at non-driven ends for small part transfers



Sidewall Cleated Belts

Used for small part handling



Adjustable Angles

- 0° - 35° for Flat Belts
- 25° - 60° for Cleated Belts

