




Specifications:

- Straight Flat and Cleated Modular Plastic Belt models
- Curved Flat Modular Plastic Belt model
- Z-frame Flat and Cleated Modular Plastic Belt models
- Loads up to 1,000 lbs (453 kg)
- Belt speeds up to 250 ft/min (76 M/min)
- Belt Widths:
 - Curves: 8" (203 mm) to 36" (914 mm)
 - Straights: 8" (203 mm) to 60" (1,524 mm)
 - Z-frame Straights and Curves:
8" (203 mm) to 24" (610 mm)
- Conveyor Lengths: 36" (914 mm) to 999" (25,375 mm)
- CE models available

Features & Benefits:

- Quick slots make mounting air and electrical lines simple
- Completely contained belt reduces pinch points
- Integrated wire way for low voltage wires
- Side rail design make reconfiguration quick and easy
- Open top frame simplifies belt maintenance and replacement
- Support stands mounted directly to side rail keep frame open for mounting accessories
- Nose bar tail (option)

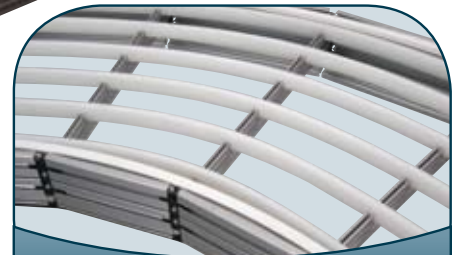





**Modular 15°
Curve Segments**



**Quick and Easy Frame
Reconfiguration**



**T-Slots and Quick Slots
for Accessory Mounting**

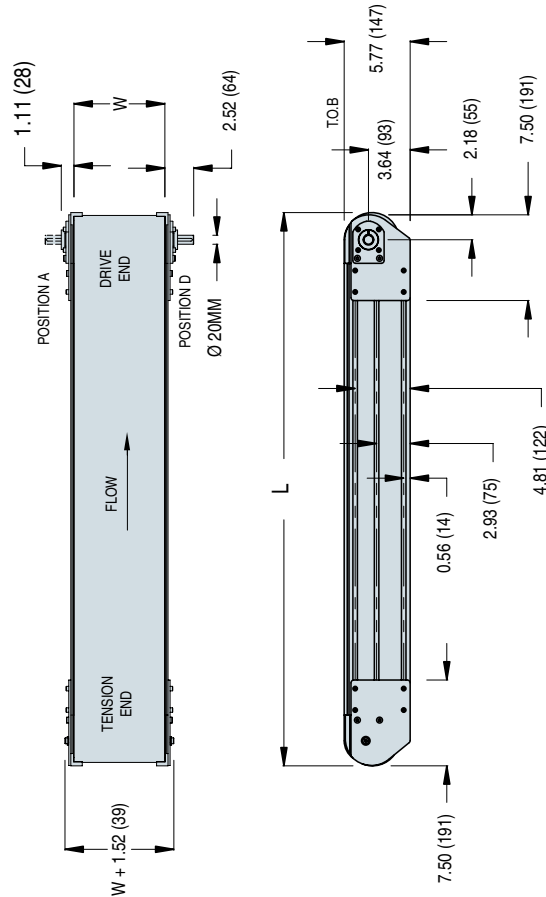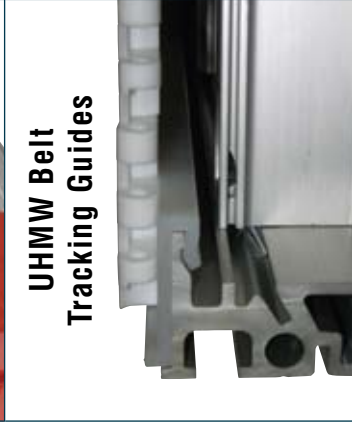

W = Conveyor Belt Width **Dim** = in (mm)

